


### Use of MVR500E modules with remote local pushbutton

#### D600V

The D600V accessory prevents the return to pilot wire of a local control.

(\*) In case of remote button, add a D600V if the voltage across the BP and N terminals of MVR500E is above 20 V.

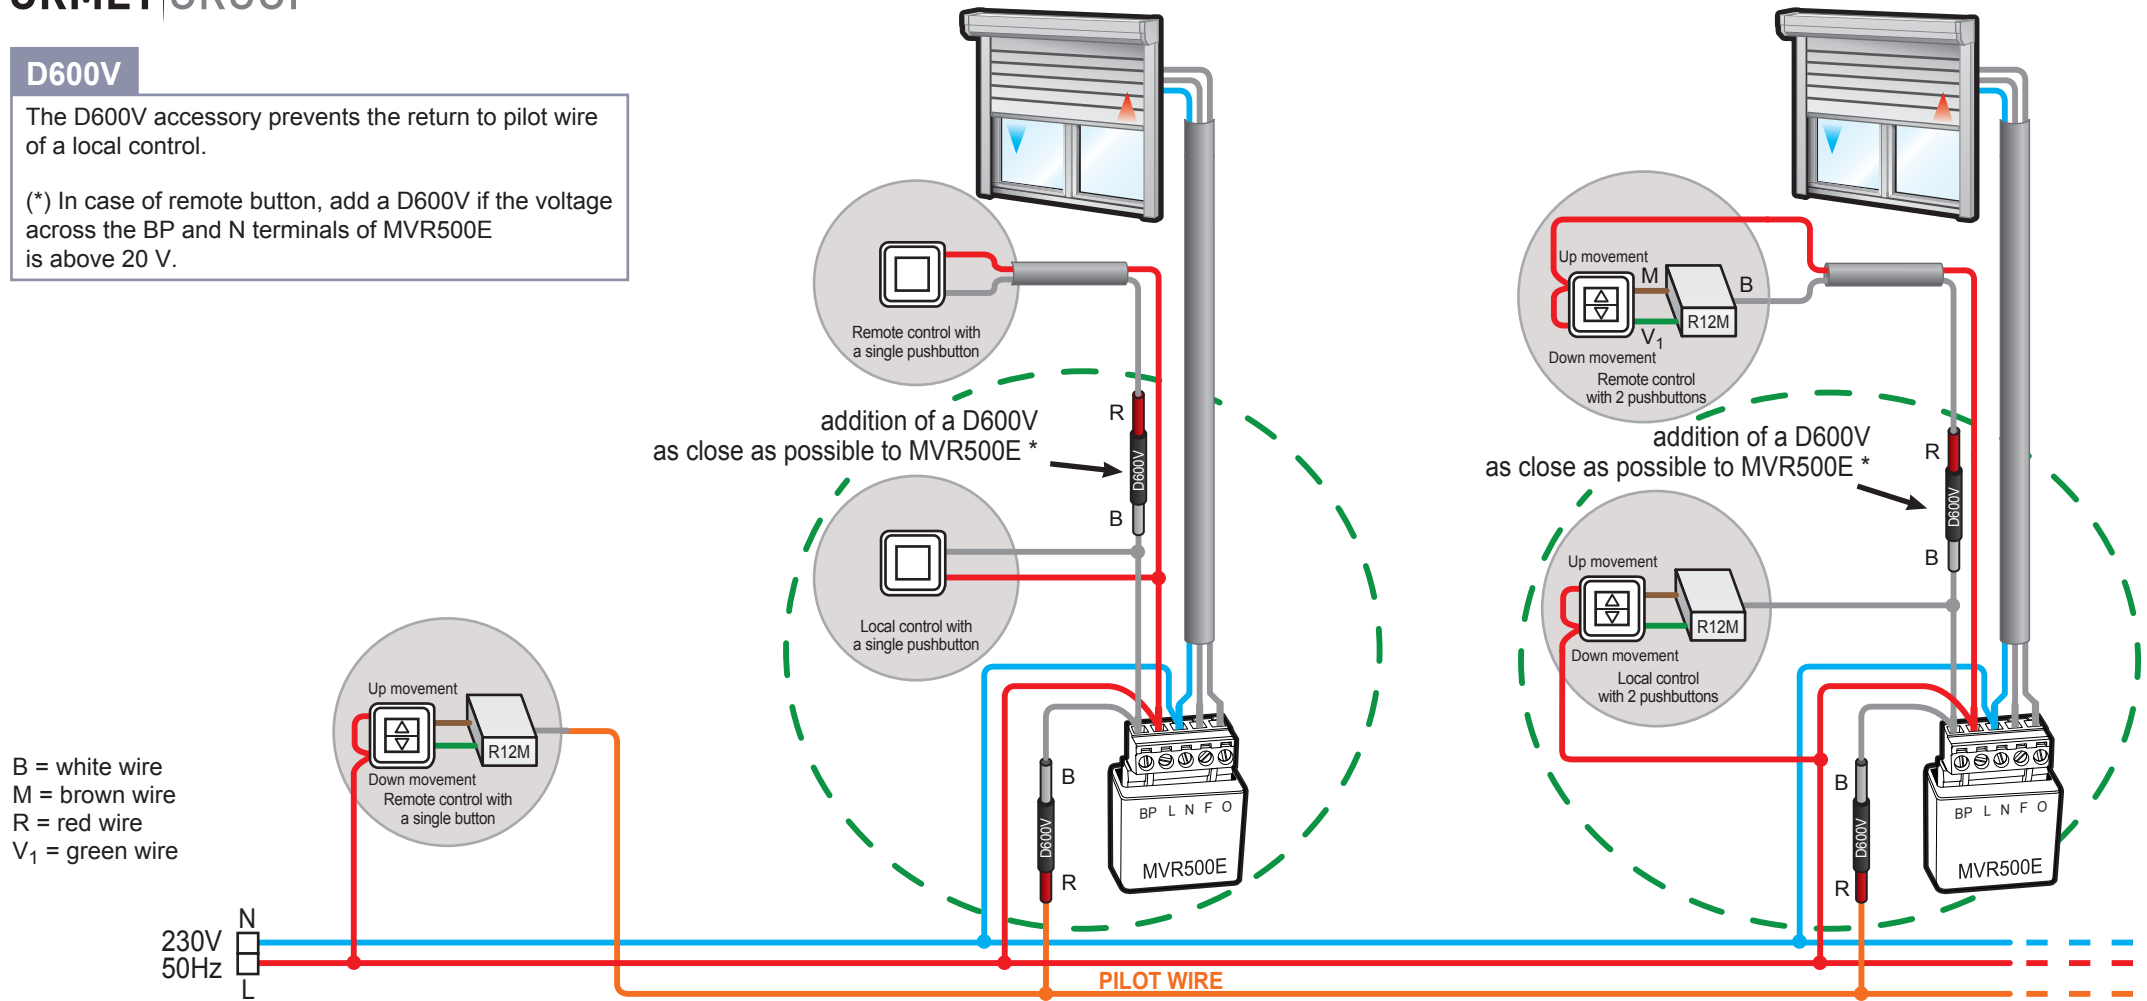

#### INTERMEDIATE POSITION STORAGE

To do so, completely close shutter, open it and then take it to the desired intermediate position. Make 5 short presses to store the position.

From this moment onwards, when shutter is closed, open or in any other position, 2 short presses will be enough to take it back to the stored position.

#### DAILY SCHEDULER

daily opening and closing times can be scheduled. To do so, at the DESIRED TIME, make:

- 8 presses to store the closing time
- 9 presses to store the opening time
- 7 presses to store the intermediate position time

NOTE: In case of power supply failure, MVR500E deletes all scheduled values; it will thus be necessary to repeat the configuration to the desired times. As an alternative, you can connect an external time switch or a twilight sensor through accessory CVI34 (Part no. 5454806).