

RADIO: MTV500ER Dimmer Module, with neutral


500 RANGE MTV500ER radio dimmer can be used with energy-saving light bulbs or LED bulbs **only if dimmable**. Always make a trial to check the compatibility between bulb and dimmer.
As the module features a neutral connection, the use of the CHR3W accessory is not necessary.
There are nevertheless special installations, mainly when LED lights are used, for which the CHR3W accessory can prove useful to eliminate flickering at low brightness levels.

IMPORTANT

Recall the minimum brightness level with 4 short presses, and make sure that the bulb turns on.
Should this not be the case, set minimum brightness level to a higher value.
To do so, proceed as follows:

- apply **23** short presses to release the module, set the selected brightness through a long press on pushbutton,
- then apply **27** short presses. The module will reply by flashing **7** times for confirm

ADDITION OF A CHR3W RESISTIVE LOAD PARALLEL WITH BULB

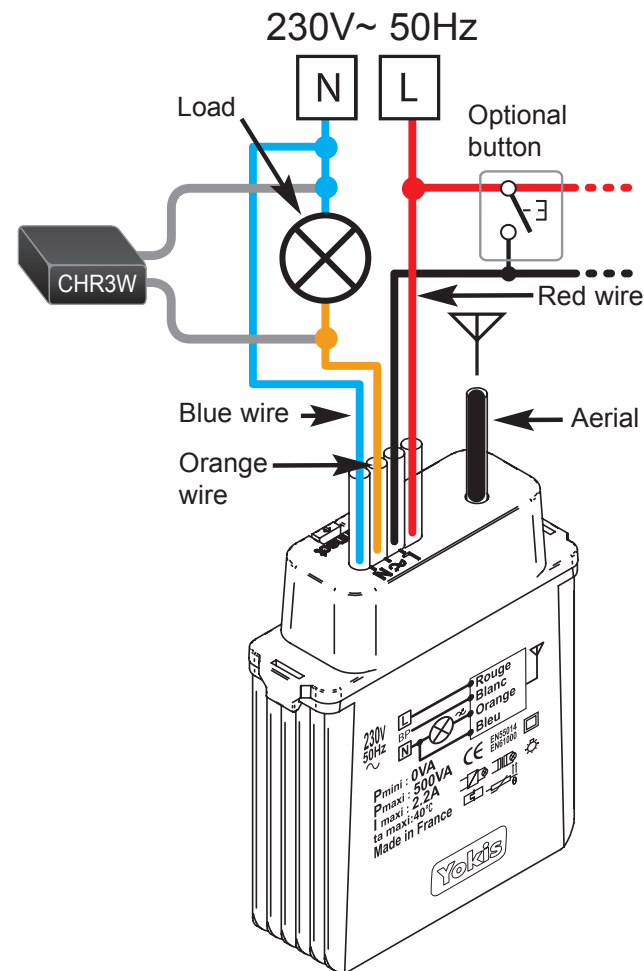

TECHNICAL INFORMATION

Model: CHR3W
Item no.: 5454070
Description: 3 W resistive load